




Products for tomorrow...

MEDER electronic AG
 Robert-Bosch-Strasse 4
 D 78224 Singen
 Tel.: 07731-83990
 Fax: 07731-839932
 eMail: info@meder.com
 Internet: www.meder.com

Type: MRE05-4A79-HI


Partnumber: 8205479400

Dimensions (mm)

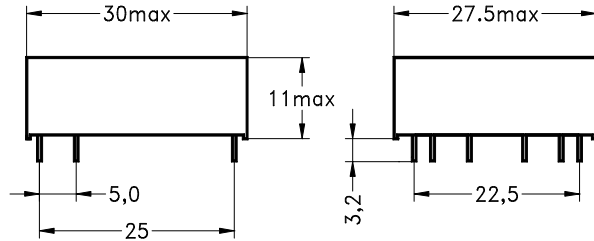

Pins: \varnothing 0,65 mm / L 3,2 mm \pm 0,3 mm

Layout / Pitch 2,5 mm / Top View



Marking

MEDER-Label
 Type
 Layout
 Production Code

Coil/Relay Characteristics	Conditions	Min.	Typ.	Max.	Units
Coil Resistance	at 20°C	68	75	83	Ω
Nominal Voltage			5		VDC
Nominal Rated Power			333		mW
Thermal Resistance			36		K / W
Operate Voltage	at 20°C			3,8	VDC
Release Voltage	at 20°C	1,0			VDC

Contact Data 79 (Form A/Dry)					
Contact Material				Rh	
Contact Rating	Any combination of the switching voltage and carry current must not exceed the given rated power			25	W
Switching Voltage	DC or Peak AC			1000	VDC
Switching Current	DC or Peak AC			1	A
Carry Current	DC or Peak AC			2	A
Static Contact Resistance (initial)	Measured with Nominal Voltage at 20°C			150	m Ω
Insulation Resistance	RH Ω 45%	10^{14}			Ω
Breakdown Voltage		1500			VDC
Capacitance			0,4		pF

Relay Data					
Insulation Resistance Coil to Contact	RH Ω 45%	10^{14}			Ω
Dielectric Strength Coil to Contact		2			kV AC
Shock	½ sine wave, duration 11ms			50	g
Vibration	from 10 - 2000 Hz			20	g
Operate Time including bounce	Measured with Nominal Voltage at 20°C		1,0		ms
Release Time	Measured with no coil suppression		0,4		ms

General Data					
Operating Temperature	10°C/min max. allowable	-20		70	°C
Storage Temperature	10°C/min max. allowable	-35		95	°C
Soldering Temperature	5 sec. at			260	°C
Washability				fully sealed	
Material of Case				Plastics / Polycarbonat	
Sealing Compound				Special Potting (Epoxi or Polyurethan)	
Material of Pins				Cu-alloy tinned	
Besides				Relay with extremely high insulation resistance $\geq 10^{14} \Omega$	

Customer	Standard Product
----------	-------------------------